



975 Instructional Audio System

CONNECT POWER TO THE 975


Connect the power supply to the 975 and plug the cord into an AC outlet.



The 975 will power on and the power light will glow.

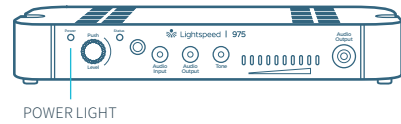


USING THE FLEXMIKE




Remove microphone from charger. Press the mute button to unmute, hold near your mouth and begin speaking.


ALIGN WITH COLLARBONE



USING THE SHAREMIKE



Remove microphone from charger and press the mute button to begin speaking.




CHARGE MICROPHONES NIGHTLY

Place the microphones into the cradle charger. The power status light will glow red when it is charging.

It takes about 5-6 hours to fully charge the microphone battery.

When charging is complete, the power status light will glow green.

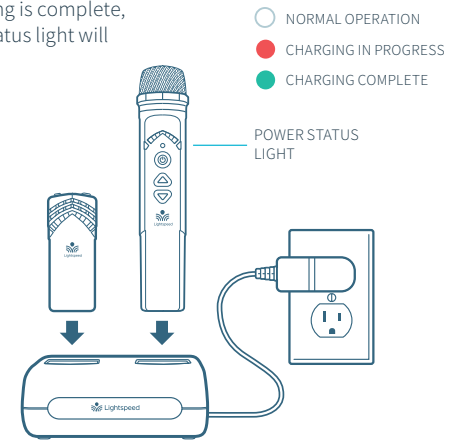

USING A WIRELESS AUDIO LINK


You can connect your 2nd (or 3rd) microphone to your computer's USB port to enable a wireless 2-way audio link.

SEND AUDIO FROM THE COMPUTER to the 975 to ensure all audio from the computer (videos, video conferencing, audiobooks, music, etc) can be played through the Lightspeed 975 system and speakers.

SEND AUDIO TO THE COMPUTER from the 975 to ensure the teacher's Flexmike and any student microphones are clearly picked up by a video conferencing solution.



Connect the microphone to your computer using a USB-C cable. Open your computer sound settings to select FlexmikeAudio as the microphone and speaker.

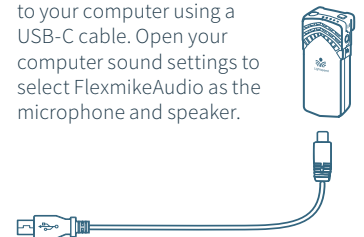

USB cable sold separately. Lightspeed offers a USB-A to USB-C cable for sale (part #USBC)



PAIRING MICROPHONES TO THE 975



Your system is shipped with microphones and base units pre-paired for quick and easy use. If you ever need to pair new components, follow this pairing process:

1 POINT MICROPHONES AT TOPCAT

From a powered off state, point the IR transmitter lens toward the base unit (for ShareMike, the transmitter lens is located on the back of the microphone).

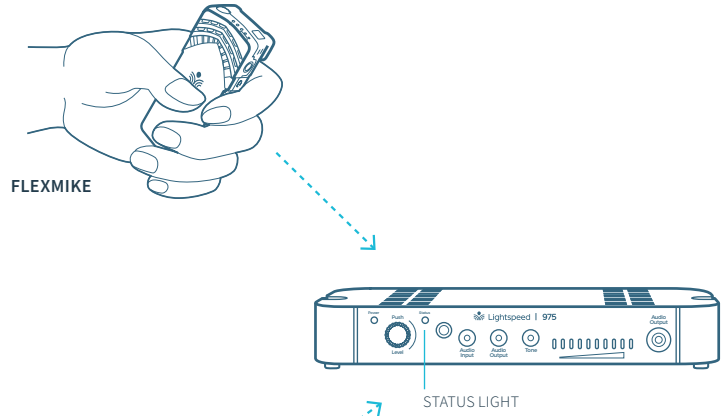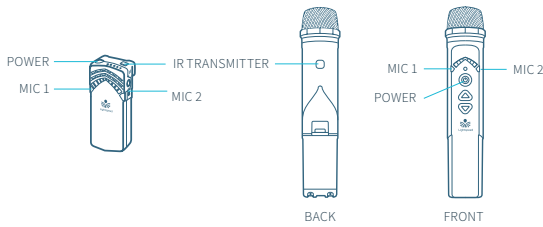

2 PRESS AND HOLD POWER BUTTON

Press and hold the power button for 5 seconds until the Mic 1 and Mic 2 lights start flashing, then release the button and let the pairing process finish.



3 CONFIRM STATUS

The status light on the 975 will light up indicating the pairing process is complete. The Mic 1 or Mic 2 light on the microphone will stay illuminated.

